


KEY NOTES

- ** VERIFY ALL LOCATIONS OF EXISTING UTILITIES, ROADS, PAVINGS, PROPERTY LINES, SET BACKS, DIMENSIONS, ETC., PRIOR TO BEGINNING CONSTRUCTION OPERATIONS.
- ** REFER TO ARCHITECTURAL PLANS FOR ALL CONCRETE FLATWORK, SIDEWALKS, RAMPS, STEPS AND HANDRAILS THAT ARE ADJACENT TO BUILDINGS.
- ** REFER TO THE STORM WATER POLLUTION PREVENTION PLAN FOR EROSION CONTROL REQUIREMENTS.
- 1 ***CAUTION*** EXISTING OVERHEAD LINES!!!
- 2 REMOVE EXISTING TREES.
- 3 EXISTING FENCE TO REMAIN.
- 4 SEE DRAINAGE PLAN SHEET C11 FOR DRAINAGE PIPE INFORMATION.
- 5 PROVIDE 4" TOPSOIL ON ALL NEWLY GRADED AREAS AND AREAS DISTURBED BY CONSTRUCTION OPERATIONS.
- 6 PROPOSED BUILDING. SEE ARCHITECTURAL PLANS.
- 7 CLEAR AND GRUB TREES AND VEGETATION UNDER NEW BUILDING AND PARKING LOT.
- 8 INSTALL STANDARD CONCRETE DRIVEWAY. SEE STD DRIVEWAY DETAIL SHEET.
- 9 INSTALL 6"x18" REINFORCED CURB AND GUTTER. SEE SHEET C16.
- 10 CONSTRUCT STANDARD 4" THICK REINFORCED CONCRETE SIDEWALK (WIDTH = 6') WITH MAXIMUM 2.0% CROSS SLOPE. SEE DETAILS SHEET C16.
- 11 INSTALL STANDARD CONCRETE ACCESS CURB RAMP. SEE DETAIL SHEET C16.
- 12 PROPOSED HANDICAP PARKING SPOT. PAINT BLUE HANDICAP SYMBOL (TYP) AND INSTALL HANDICAP PARKING SIGNS, STRIPING AND WHEEL BLOCK. SEE GENERAL NOTES FOR MORE DETAILS. THE MAXIMUM SLOPE IN A HANDICAP PARKING SPACE CANNOT EXCEED 2.0% IN ANY DIRECTION. REFER TO GRADING PLAN.
- 13 INSTALL ASPHALT PAVING. SEE DETAIL SHEET C16.
- 14 CONSTRUCT HEAVY DUTY 7" THICK REINFORCED CONCRETE PAD WITH THICKENED EDGE FOR DOCK PARKING AREA. SEE DETAIL ON SHEET C16.
- 15 PROPOSED PARKING AREA. PAINT 4" WIDE WHITE STRIPES (TYP).
- 16 PAINT PEDESTRIAN CROSSWALK.
- 17 PROVIDE ACCESSIBLE ROUTE WITH A MAXIMUM CROSS SLOPE OF 2.00% AND MAXIMUM RUNNING SLOPE OF 5.00%.
- 18 COORDINATE RELOCATION OF OVERHEAD ELECTRIC W/SHEPCO. CONTACT ACCORDINGLY.
- 19 INSTALL 'HANDICAP PARKING' SIGN.
- 20 MECHANICAL EQUIPMENT AREA.
- 21 DUMPSTER AREA.
- 22 PIPELINE SADDLES TO REMAIN.
- 23 MONUMENT SIGN LOCATION.
- 24 PROPOSED FENCE LOCATION.
- 25 EXISTING FENCE TO BE REMOVED.
- 26 DEMOLISH AND REMOVE EXISTING CONCRETE DRIVE.

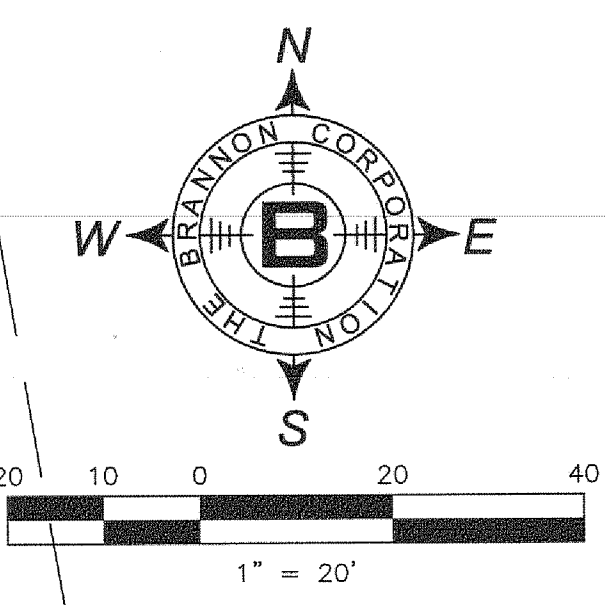

**DCP
MIDSTREAM**

CARTHAGE, TEXAS
South Shelby St. (US 59)

Gensler

1625 Broadway
Suite 400
Denver, CO 80202
Telephone 303.595.8585
Facsimile 303.825.6823



DESIGNED BY: JLV
THE PROJECT NO.: 10-013
ISSUED FOR: PRELIMINARY USE

ISSUE DATE: JUNE 2010

AUGUST 23, 2010

Issue	Date & Issue Description	By	Check
-------	--------------------------	----	-------

SHEET INDEX	
SHEET NO.	DESCRIPTION
SHEET C1	SITE PLAN
SHEET C2	FINAL PLAT
SHEET C3	GENERAL NOTES
SHEET C4	OVERALL WATER AND SEWER MAP
SHEET C5	DRAINAGE AREA MAP
SHEET C6	STORM WATER POLLUTION PREVENTION PLAN
SHEET C7	GRADING PLAN
SHEET C8	SANITARY SEWER (STA 0+00 TO 5+50)
SHEET C9	SANITARY SEWER (STA 5+50 TO 10+50)
SHEET C10	SANITARY SEWER (STA 10+50 TO END)
SHEET C11	STORM SEWER (STA 0+00 TO END)
SHEET C12	ADA DETAILS
SHEET C13	CURB INLET DETAILS SHEET
SHEET C14	STANDARD WATER DETAIL SHEET
SHEET C15	STANDARD SANITARY SEWER DETAIL
SHEET C16	STANDARD COMMERCIAL PAVING DETAILS SHEET
SHEET C17	STANDARD DRIVEWAY DETAILS SHEET
SHEET C18	EROSION CONTROL DETAIL SHEET (1)
SHEET C19	EROSION CONTROL DETAIL SHEET (2)

SHEET NOTES

Seal/Signature

Project Name

CARTHAGE FIELD OFFICE

Project Number

03.7095.003

CAD File Name

Description

Scale

C1

